

Application

| | |
|------------------------|---|
| Beam style | variable-spread, well-defined soft beam |
| Suitable for | medium to large scale theatre |
| Specification level | professional range |
| Beam angle | 8° - 60° |
| Typical throw distance | 2 - 17m |

Electrical specifications

| | |
|----------------------|---|
| Supply Volts | 230/240V AC single phase |
| Max. Lamp Watts | 1200W |
| Lamp base | GX9.5 |
| Auto-disconnect | double-pole microswitch |
| Cable/connection | 1.5m 3x1.5mm ² flexible cable to bare ends |
| Standards Compliance | EN60598-2-17, CE marked |

Mechanical specifications

| | |
|-------------------------|---|
| Paint/Finish | black white or silver epoxy powder paint |
| Lamp house construction | extruded aluminium and sheet steel |
| Reflector | 100mm diameter aluminium |
| Lens | 150mm diameter Pebble-Convex |
| Mounting & suspension | steel stirrup with 12mm centre hole and DIN mounting. Stirrup rotates 360° around the body of the luminaire |
| Rear handle | yes |
| Weight/Packed weight | 6.2kg / 7,6kg |
| Packed volume | 0.05m ³ |
| Filter cut size | 185 x 185mm |
| Accessory runners | 3 slots |
| Safety guard | included |
| Colour frame | metal, 185x185mm, supplied |
| Lamp access | hinged base |
| Lens access | front and via lamp access |

Operational specifications

| | |
|-----------------------|---|
| Focus adjustment | screw-focus with front and rear control |
| Working position | max. tilting ±90° from horizontal |
| Beam Shaping | using barndoor accessory |
| Positional adjustment | single rim-clamp tilt lock |

Lamp types

| | |
|----------------|--|
| 650W 230V | CP67 3200K 120 hrs / T21 3000K 900 hrs |
| 1000W 230V | CP70 3200K 240 hrs / T19 3050K 900 hrs |
| 1200W 230V | CP90 3200K 240 hrs / T29 3000K 480 hrs |
| 1000W 115/120V | T11 3050K 750 hrs GE88515 |

LDR recommends Philips lamps

Accessories

| | |
|----------------------------|--|
| Spare metal colour frame | ■20100106 □20100106B ■20100106C |
| Spare safety guard | ■20100206 □20100206B ■20100206C |
| 4-leaf barndoor, aluminium | ■20100306 □20100306B ■20100306C □■20100306D ■■20100306E |
| Hook clamp | 20100900 |
| Safety bond | 20101300 |
| Colour scroller Xpress 19 | 20106019 with mounting plate 20600006 |

Photometric data

| Spot focus | CP90 | | | | | | | | | |
|------------|------|------|------|------|------|------|------|-----|-----|---|
| Beam dia. | 1.3 | 1.4 | 1.5 | 1.7 | 1.8 | 2.0 | 2.1 | 2.2 | 2.4 | m |
| lux | 3022 | 2448 | 2023 | 1700 | 1449 | 1249 | 1088 | 956 | 847 | |
| Distance | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | m |


| Flood focus | | | | | | | | | | |
|-------------|------|------|-----|-----|-----|-----|-----|------|------|---|
| Beam dia. | 2.3 | 3.5 | 4.6 | 5.8 | 6.9 | 8.1 | 9.2 | 10.4 | 11.5 | m |
| lux | 2440 | 1084 | 610 | 390 | 271 | 199 | 153 | 120 | 98 | |
| Distance | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | m |

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

nota[®] pc1200 plus

650W – 1200W
pebble-convex


part number : ■10852000 □10852001 ■10852002

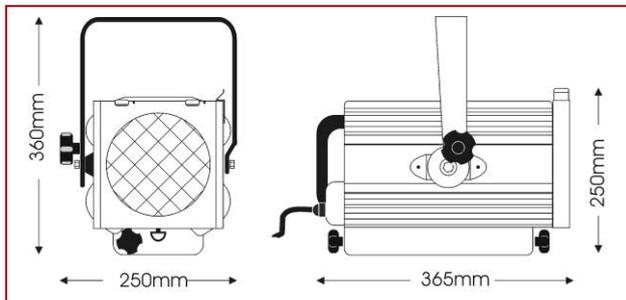

Quality 1/1200W pc spotlight with a screw focus variable-spread tight-edged beam, an easily adjustable lamp position for either 1000W or 1200W lamps, effective tilt lock and double-microswitch interlock for safe lamp replacement.

A colour frame, safety guard and 1.5m mains cable are included as standard.

Specials: also available with polished pebble convex (PPC) lens part # 10852100



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2014. LDR reserves the right to alter the specification without prior notice.