

Application

Beam style	well-defined, flat field profile projection
Suitable for	medium / large scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 – 30m

Electrical specifications

Supply Volts	230/240V AC single phase to ballast unit
Max. Lamp Watts	575W
Lamp base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m, multicore cable to ballast, 2m 3x2.5mm ² bare ended cable to power
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black/white epoxy powder paint
Lamp House Construction	extruded aluminium and sheet steel
Ballast	external unit (supplied) with on/off switch
Reflector	68mm diameter aluminium
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Spigot for ø28mm tube supplied
Handle	rear and side
Weight/Packed weight	19,8kg / 23,7kg – ballast 16,5kg / 17,5kg
Packed volume	0.204m ³ ballast: 0.049m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Colour frame	metal, 185 x 185mm, supplied
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia/softness) at side
Lamp alignment	factory set
Beam Shaping	20-leaf iris included; shutters are accessories
Dimming	optical dimmer iris included
Positional adjustment	lever tilt clamp

Lamp types

575W 6000K	Philips MSD 575 GX9.5 3.000 hrs
575W 7200K	Philips MSR 575/2 GX9.5 1.000 hrs

LDR recommends Philips lamps

Accessories

Spare metal colour frame	■20100106	□20100106B
5-colour colour changer	■20105106	□20105106B
Spare iris diaphragm	20100707	Gobo holder, A/B size 20100807
Black tripod	20102401	Chrome plated tripod 20102402
Spare spigot ø28mm	20102200	
Kit 1-hand control iris/dowser	20107070	Stirrup-kit for suspension 20102900
Flight case with braking wheels	20107080	for f.spot/ballast/col.chang./tripod

Photometric data

Narrow focus	575 MSR									
Beam dia.	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9	3.1	m
lux	2908	2227	1759	1425	1178	990	843	727	633	
Distance	14	16	18	20	22	24	26	28	30	m


Wide focus										
Beam dia.	2.6	3.2	3.7	4.2	4.7	5.3	5.8	6.3	6.8	m
lux	1363	946	695	532	421	341	282	237	202	
Distance	10	12	14	16	18	20	22	24	26	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

Canto® 575msd/msr MK2

230V 50/60Hz discharge followspot

part number : ■10577180 □10577181

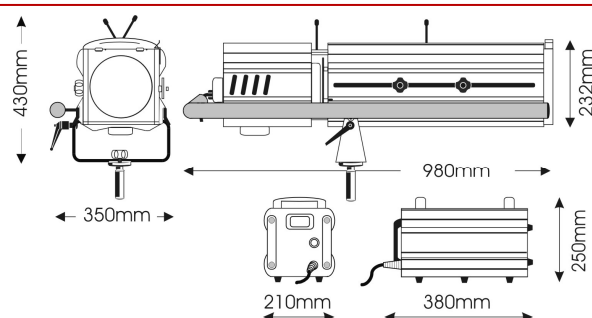

This medium-throw discharge followspot for either MSD or MSR 575 lamp has been completely re-engineered to offer the market an even wider and better set of features. A large, user-friendly side handle, new mechanics on the mechanical dimmer and a number of upgrades new features add to the existing specifications which have made Canto® a world-wide success.

Also included are an external ballast, iris, mechanical dimmer, spigot, colour frame and 2m mains cable. A 5-colour colour changer is available as an optional extra.



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

Issue: ap ©2009. LDR reserves the right to alter present specifications without prior notice.